


PROJECT: _____

TYPE: _____

QUANTITY: _____

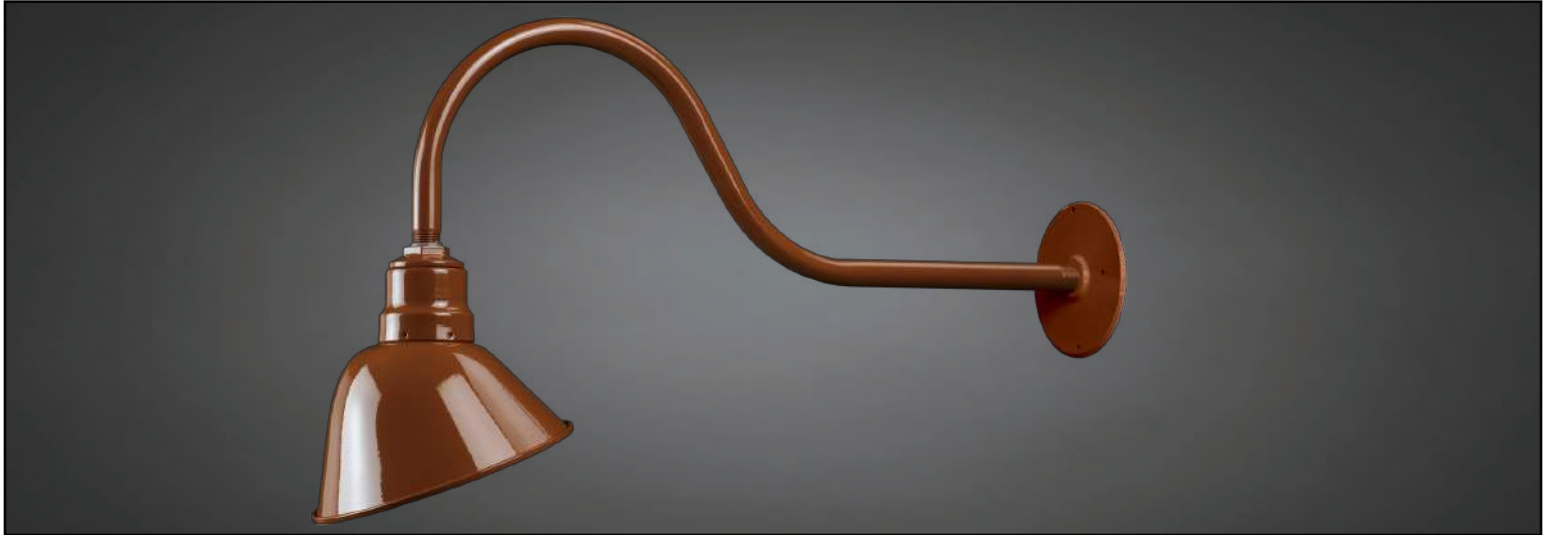

PN: 5

APPLICATION	• WALL MOUNT • INDOOR OR OUTDOOR RATED
DIMENSION	• 8" DIA (20CM)
ILLUMINATION	• DIRECT • LED 90CRI • 1,104 - 1,264 LUMENS
ELECTRICAL	• 120V, 277V, AND 347V • 10kA SURGE SUPPRESSION STANDARD
DRIVER	• WALL MOUNT (INTEGRAL) • REMOTE MOUNT (INDOOR OR OUTDOOR)
DIFFUSERS	• CLEAR OR FROSTED GLASS GLOBE
MOUNTING	• WALL, MOUNTED OVER A 4"(10CM) J-BOX
CONSTRUCTION	• ALUMINUM W/ STAINLESS STEEL MOUNT
FINISHES	• AVAILABLE IN ANODIZED, BRUSHED, AND SEVERAL TMS POWDER COATED FINISHES • CUSTOM RAL FINISHES AVAILABLE
DIMMING	• 0 - 10V STANDARD DIMMING





PROJECT: _____

TYPE: _____

QUANTITY: _____

5 - 1 - 2 - 3 - 4 - 5 - 6 - 7 - 8 - 9 - 10

1.	ILLUMINATION									
	100IN ¹					15LED				
LED (W)	100W					15W				
LUMENS	1104					1264				

2.	---	30K	35K	40K
LED CCT	NONE	3000K	3500K	4000K

3.	120	277	347
VOLTAGE	120V	277V	347V

4.	---	WM	N1	N4
DRIVER	NONE	WALL MOUNT (INTEGRAL)	REMOTE INDOOR MOUNT (NEMA 1)	REMOTE OUTDOOR MOUNT (NEMA 4)

5.	F04	F05	F15	F16	F09	F31	F18	F06	F07	F08
FINISH ²	MATTE WHITE	GLOSS WHITE	MATTE BLACK	GLOSS BLACK	PEWTER	SILVER METALLIC	SATIN ALUMINUM	CLAY BROWN	ZEUS BROWN	MIDNIGHT BLUE
	F10	F11	F13	F14	F21	F22	F24	F25	F26	F28
	FIRE RED	CITRUS ORANGE	FOREST GREEN	SUNSHINE YELLOW	ARCH. BRONZE	HARVEST GOLD	MELTED PLATINUM	MELTED GOLD	MELTED COPPER	DARK CAMPAGNE
	F32	F33	F38	F39	F40	F41	F42	F43	F45	RAL
	BRONZE METALLIC	PYRITE BRONZE	MEADOW GREEN	AQUA BLUE	BUBBLE PINK	ELECTRIC PURPLE	FAUX CHROME	FAUX GOLD	COPPER METALLIC	CUSTOM (SPECIFY RAL)
	BR	AN								
	BRUSHED ALUMINUM	ANODIZED								

6.	---	DIML
DIMMING	NONE	LED DIMMING (0 - 10V, CURRENT - SINKING)

7.	---	EM	EMC	EMR	EMCR
EMERGENCY ³	NONE	INTEGRAL	INTEGRAL COLD PACK	REMOTE	REMOTE COLD PACK

8.	---	G1	G2
GLOBE/ ⁴ LENS	NONE	CLEAR, ELONGATED GLOBE	FROSTED GLOBE


9.	---	W8
WIRE GUARD	NONE	8" WIRE GUARD

10.	---	AK
ACCESSORIES	NONE	AIMING KNUCKLE

1. INCANDESCENT SYSTEMS USE A MEDIUM BASE SOCKET (E26) 3. 10W AT 90 MINUTES. EMERGENCY OPTION IS ONLY AVAILABLE IN 120 - 277V SYSTEMS
2. REFLECTOR INSIDE IS FINISHED WHITE
4. GLOBES ARE NOT AVAILABLE WITH INCANDESCENT SYSTEMS

NOTE: SOME OPTIONS MAY NOT BE COMPATIBLE WITH OTHERS. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. CONTACT TMS LIGHTING FOR UPDATED SPECIFICATIONS.

5

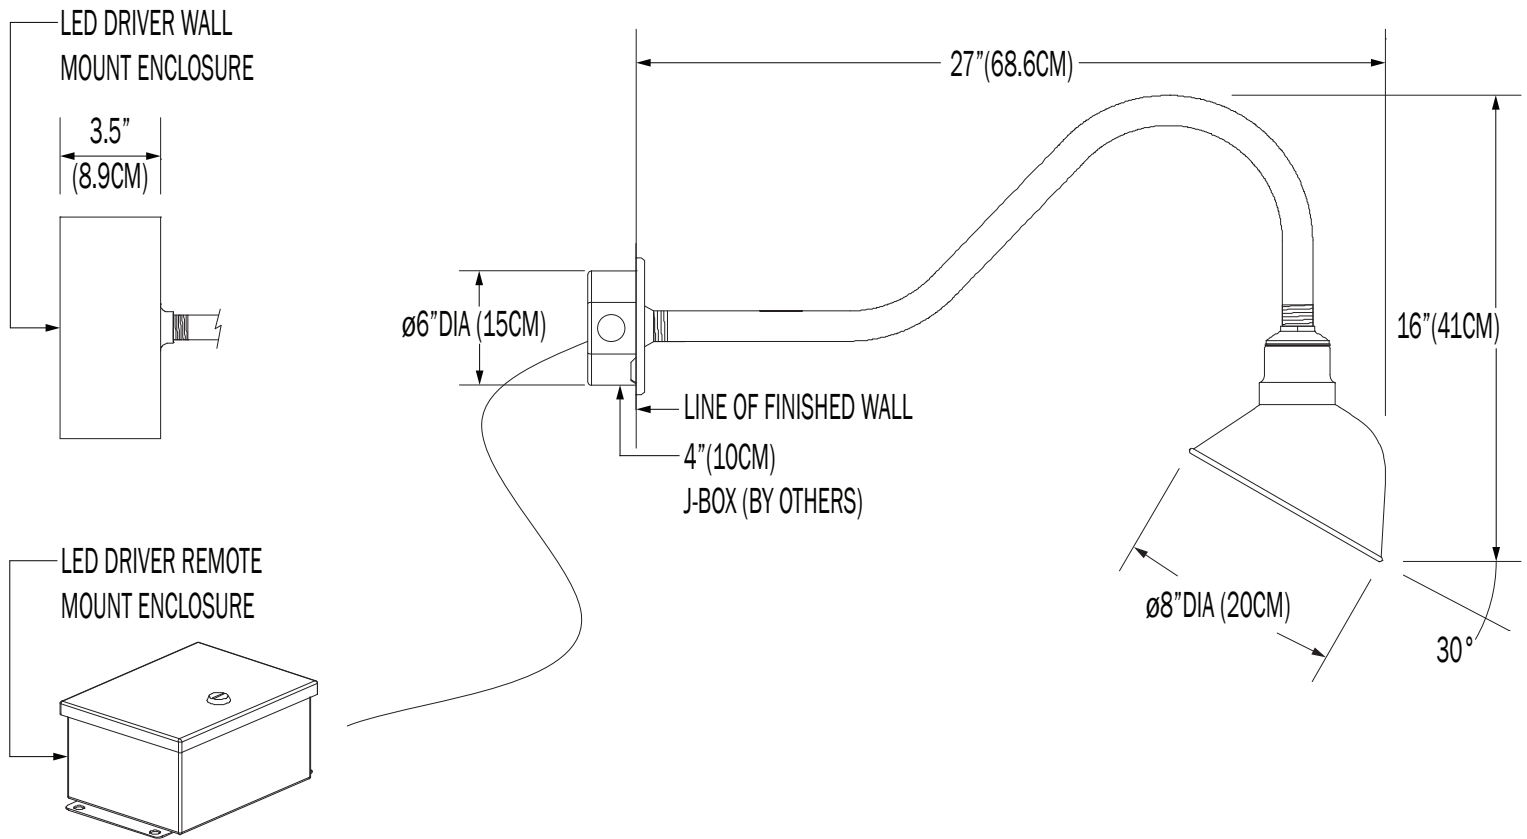

CUSTOM

NOTE: THIS FIXTURE CAN BE CUSTOMIZE. DIMENSION, LAMP TYPES, ENCLOSURE, AND COLOR CAN BE MODIFIED TO SUIT YOUR LIGHTING AND ARCHITECTURAL REQUIREMENTS. CONTACT YOUR LOCAL REPRESENTATIVE FOR MORE DETAILS: <https://tmslighting.com/sales-agents.html>

TMSLIGHTING


DIRECT

PN	ILLUMINATION	LUMENS	WATTAGE
5	15LED	1104	15
	100IN	1264	100

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 5 15LED.IES

POLAR GRAPH

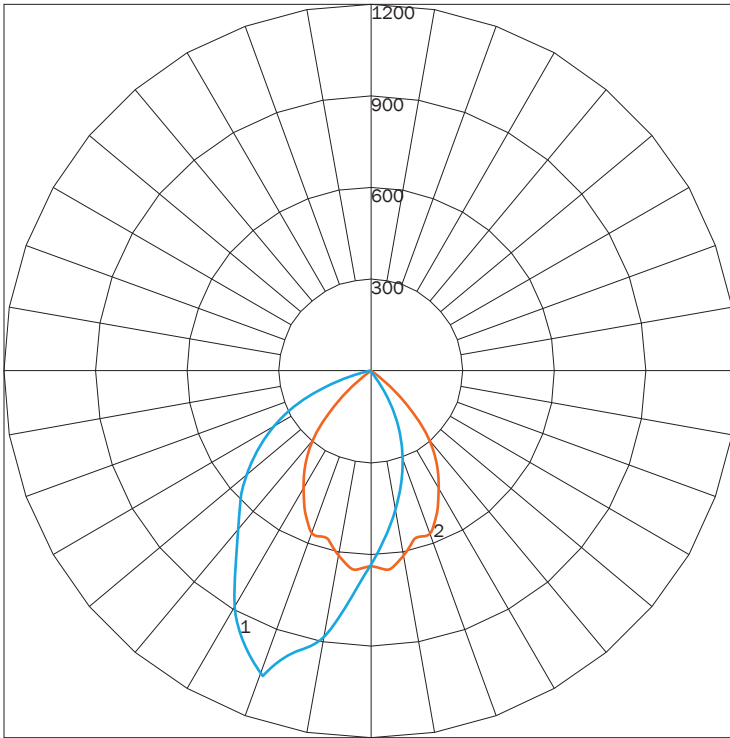

MAXIMUM CANDELA = 1058.53 LOCATED AT HORIZONTAL ANGLE = 0, VERTICAL ANGLE = 19.5
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270) (THROUGH MAX. CD.)
 # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180) (THROUGH MAX. CD.)

LUMINAIRE LUMENS

1104

TOTAL LUMINAIRE EFFICIENCY

NA

LUMINAIRE EFFICACY RATING

65


TOTAL LUMINAIRE WATTS

17

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 5 100IN.IES

POLAR GRAPH

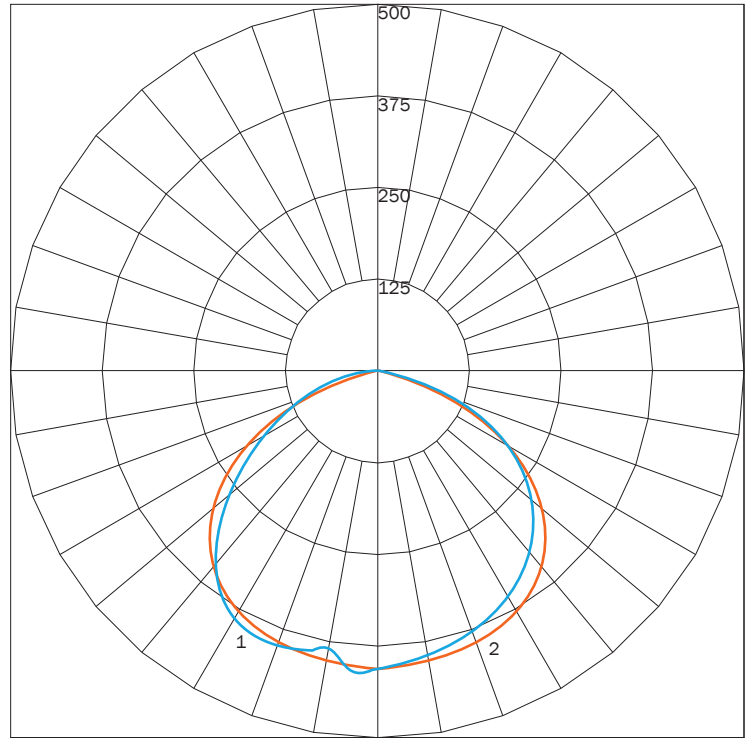

MAXIMUM CANDELA = 416.037 LOCATED AT HORIZONTAL ANGLE = 7, VERTICAL ANGLE = 3
 # 1 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (90 - 270)
 # 2 - VERTICAL PLANE THROUGH HORIZONTAL ANGLES (0 - 180)

LUMINAIRE LUMENS

1264

TOTAL LUMINAIRE EFFICIENCY

74%

LUMINAIRE EFFICACY RATING

13

TOTAL LUMINAIRE WATTS

100

FINISHES



PREMIUM FINISHES



PREMIUM MATERIALS



1: FINISHES IS APPLIED TO THE INTERIOR AND EXTERIOR OF THE FIXTURE.

2: MATERIALS ARE CONSISTENT (INTERIOR & EXTERIOR). STEMS AND CANOPIES WILL BE F16 GLOSS BLACK.

NOTE: ALL FINISHES NOT MARKED WITH NOTATION (1) ARE APPLIED TO THE EXTERIOR ONLY. THE INTERIOR WILL BE F05 GLOSS WHITE. MATTE FINISHES AVAILABLE. CONSULT FACTORY.

FINISHES ARE SUBJECT TO AVAILABILITY AND MAY NOT BE APPLICABLE TO ALL FIXTURES OR FOR QUICKSHIP.

DISPLAYED FINISHES DIFFER BETWEEN SCREENS AS WELL AS PRINTERS AND MAY NOT ACCURATELY DEPICT COLOR.